

## Dosing station DP

### Application:

Dosing station is used for measuring exact quantities of non-abrasive and non-flammable fluids.

Dosing station DP consists of a dosing tank, suction parts and a dosing pump at the top. The re-fill opening at the top of the dosing tank has a screw-on lid. If, for example, cleaning of the station is required, the components can be taken out of the tank. A dosing tube and a power cable are also supplied within the set.

### Advantages:

- Stable, solid structure, stress-crack resistant
- Light-weight
- Simple assembly and disassembly
- Simple installation, usage and maintenance
- All parts are easily accessed and can be removed and replaced

### Additional equipment:


- Hand mixer for the dosing tank
- Level switch
- Electric mixer is also available for 200 l dosing tank and time regulated systems on request.



Dosing station DP

# Dosing station DP

Technical drawing

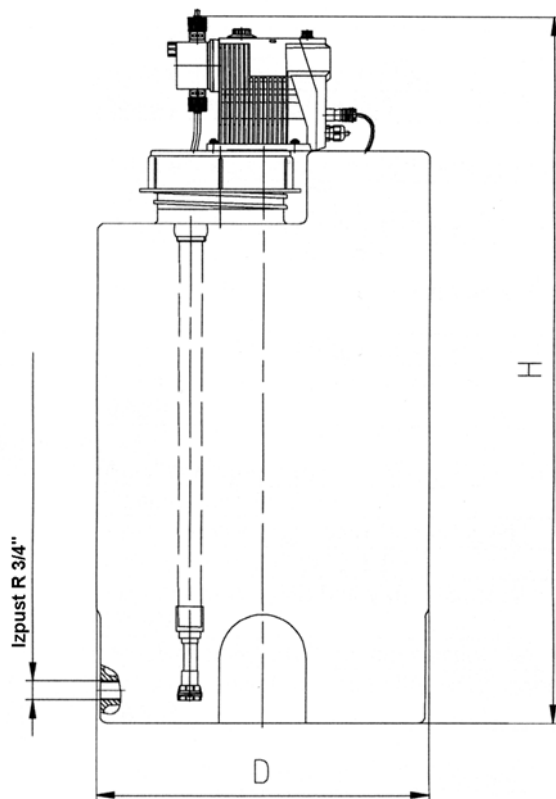

**Dosing station DP**

Dosing pump	Components		Diameter x height (mm)	Weight (kg)
	Dosing container	Dosing pump		
DP Hxx 1,0/20-60	D 60	DČ Hxx 1,0/20	460 x 860	10
DP Hxx 2,0/18-60	D 60	DČ Hxx 2,0/18	460 x 860	10
DP Hxx 4,0/10-60	D 60	DČ Hxx 4,0/10	460 x 860	10
DP Hxx 1,0/20-100	D 100	DČ Hxx 1,0/20	460 x 980	13
DP Hxx 2,0/18-100	D 100	DČ Hxx 2,0/18	460 x 980	13
DP Hxx 4,0/10-100	D 100	DČ Hxx 4,0/10	460 x 980	13
DP Hxx 6,0/07-100	D 100	DČ Hxx 6,0/07	460 x 990	13
DP Hxx 8,0/04-100	D 100	DČ Hxx 8,0/04	460 x 990	13
DP Hxx 1,0/20-200	D 200	DČ Hxx 1,0/20	600 x 1080	18
DP Hxx 2,0/18-200	D 200	DČ Hxx 2,0/18	600 x 1080	18
DP Hxx 4,0/10-200	D 200	DČ Hxx 4,0/10	600 x 1080	18
DP Hxx 6,0/07-200	D 200	DČ Hxx 6,0/07	600 x 1080	18
DP Hxx 8,0/04-200	D 200	DČ Hxx 8,0/04	600 x 1080	18
DP Hxx 16,0/02-200	D 200	DČ Hxx 16,0/02	600 x 1080	18

Option:

Dosing stations can be equipped with H and HMS dosing pump series!