


# Rotameter RPSU

Flow meter with a variable cross-section

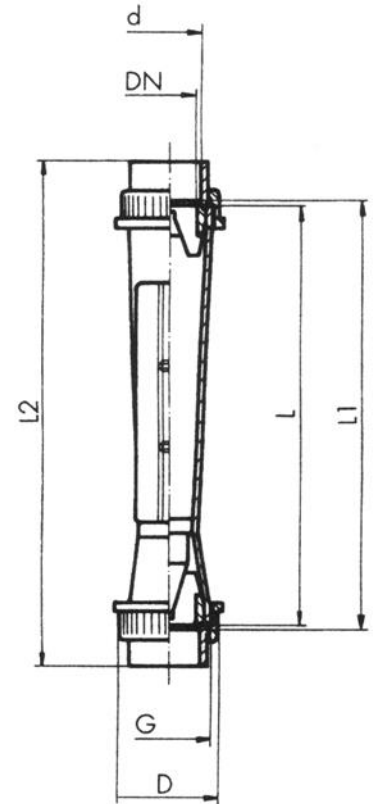

## Description

The housing of the rotameter is from trogamide or polysulphone, and the float is made from PVDF or PVDF with a magnet. Additional gauges for minimal and/or

maximal flows are available at request. Standard connections are glued with PVC. Additional connections are available on request, with the adjustments in length.

Rotameter RPSU Type	Measuring scope l/h H <sub>2</sub> O	Rotameter RPSU						
		d	DN	L	L1	L2	D	G
15	15-150	32	25	335	341	385	60	R 1 1/2 "
50	50-500	32	25	335	341	385	60	R 1 1/2 "
100	100-1000	32	25	335	341	385	60	R 1 1/2 "
200	200-2000	50	40	335	341	403	83	R 1 1/4 "
300	300-3000	50	40	335	341	403	83	R 1 1/4 "
600	600-6000	63	50	335	341	417	103	R 1 1/4 "
1200	1200-12000	63	50	335	341	417	103	R 1 1/4 "
2000	2000-20000	75	65	335	341	429	122	R 1 1/2 "
3000	3000-30000	75	65	335	341	429	122	R 1 1/2 "
8000	8000-60000	75	65	335	341	429	122	R 1 1/2 "

01-6010-001-0116-EN We reserve the right to technical changes!